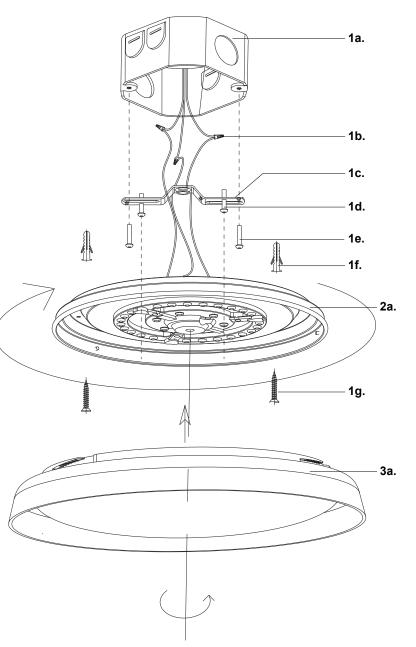# LED Flush Mount

START FROM HERE

• Make sure power is completely off at the fuse box.
• Have your fixture installed by a qualified licensed electrician
• Prepare everything in a clear area.
• Wear gloves at all times during this installation.
• Read instructions carefully before you start assembly.
• Keep this instruction sheet for future reference.

Technical Support: 1-855-855-8926

Please Note:
• All Kuzco LED fixture comes with pre-wired LED module(s).
• Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
• For dimming, an ELV (Electronic Low Voltage) type of dimmer is required.

1. Remove fixture from its original package

2. Separate crossbar **(1c)** from backplate **(2a)** by removing crossbar screws **(1d)**

3. Attach crossbar **(1c)** to electrical junction box **(1a)** using screws provided **(1e)** in hardware package

4. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts **(1b)** provided in hardware package

5. Attach backplate **(2a)** to crossbar **(1c)** with crossbar screws **(1d).** Secure backplate **(2a)** to ceiling with additional screws **(1g)** and anchors **(1f)**

6. Twist shade **(3a)** onto backplate **(2a)** to secure

1a.
1b.
1c.
1d.
1e.
1f.
2a.
1g.
3a.